


Disc spring mup
 Muelle mup
 Sprężyna talerzowa
 Mola de disco mup
 Rondelle ressort mup

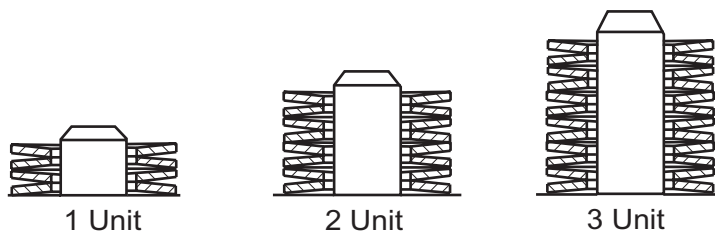

Mat. 51CrV4 - DIN EN 16983 - T.max. 150°C

s	h	De	Di	REF.
0,60	0,45	16,00	8,20	MUP/ 16,00
0,80	0,55	20,00	10,20	MUP/ 20,00
0,90	0,70	25,00	12,20	MUP/ 25,00
1,00	0,80	28,00	14,20	MUP/ 28,00
1,25	0,90	31,50	16,30	MUP/ 31,50
	1,00	35,50	18,30	MUP/ 35,50
1,50	1,15	40,00	20,40	MUP/ 40,00